

1 2 3 4 5 6

A

B

C

D

A





B

C

D

SPECIFICATIONS (规范)>>>


Current Rating (额定电流): 0.75Amps
 Withstanding Voltage (耐电压): AC 500Vmin/Minute
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Contact Resistance (接触电阻): 20 mΩ MAX
 Operation Temperature (工作温度): -40°C to +105°C
 Material (材料)>>>
 Plastic material (塑胶材质): PA6T/PA9T/LCP+30%GF
 Color (塑胶颜色): Black
 Insulator Material (绝缘材料): Polyester (UL94V-0)
 Contact Material (接触材料): Brass
 Contact Plating (接触电镀): Au Os Sn over 40u" Ni

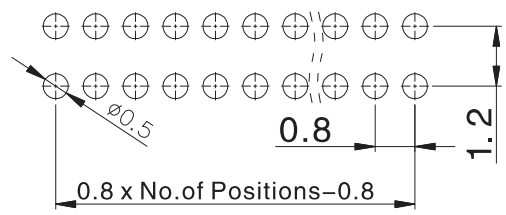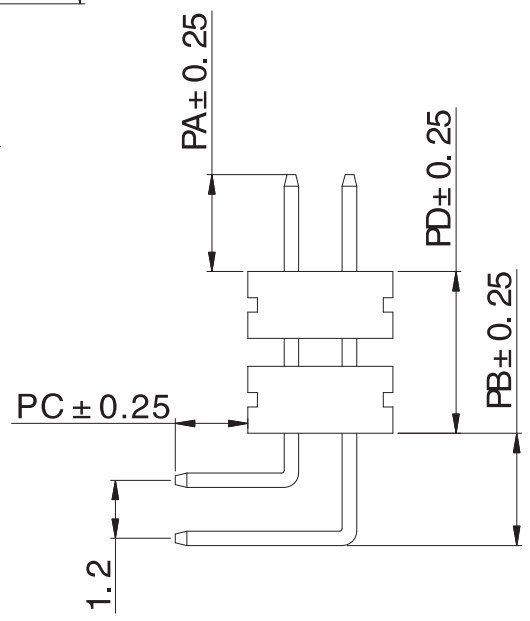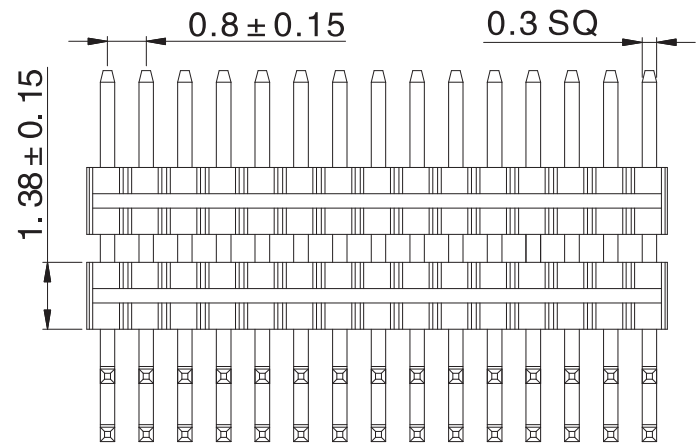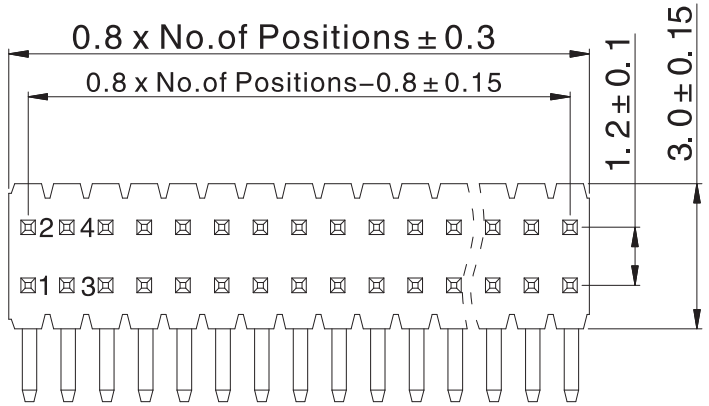

RECOMMEND P. C. B BOARD LAYOUT
 PCB TOLERANCE: ±0.05 (TOP VIEW)

Dimension antitheses list (尺寸对照表)

项目	H	PA	PC	PB	PD	SQ	W
常规尺寸	1.38	2.8	2.0	2.32	2.76	0.3	3.0
客户需要							

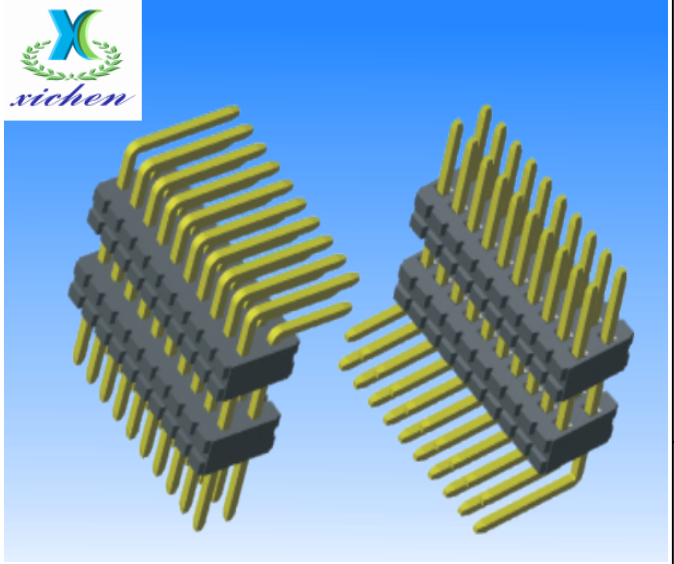

电话 (tel)	0755-23317175		 深圳市熙宸电子科技有限公司 Shenzhen xichen Electronics Technology Co., Ltd		
传真 (fax)	0755-23010246				
单位 (units)	MM	设计 (draw)	王刚	图名 (name)	PH0.8x1.2mm 双排双塑90度
比例 (scale)	1 : 1	审核 (ch'k)	陈晓俊	料号 (Part number)	
版次 (rev.)	A / 1	核准 (app'd)	李新亮	视图 (view)	
视图 (view)		日期 (date)		图档 (File Name)	

1 2 3 4 5 6