


RECOMMEND P. C. B BOARD LAYOUT  
PCB TOLERANCE:±0.05 (TOP VIEW)

SPECIFICATIONS (规范)>>>

- Current Rating (额定电流): 1.0Amps
- Withstanding Voltage (耐电压): AC 500Vmin/Minute
- Insulation Resistance (绝缘电阻): 1000MΩ Min
- Contact Resistance (接触电阻): 20 mΩ MAX
- Operation Temperature (工作温度): -40℃to+105℃
- Material (材料)>>>
  - Plastic material (塑胶材质): PA6T/PA9T/LCP+30%GF
  - Color (塑胶颜色): Black
  - Insulator Material (绝缘材料): Polyester(UL94V-0)
  - Contact Material (接触材料): Brass
  - Contact Plating (接触电镀): Au Os Sn over 40u" Ni

Dimension antitheses list(尺寸对照表)

项目	H	PA	PB	PC	SQ	W
常规尺寸	2.5	6.0	4.4	1.65	0.4	3.4
客户需要						

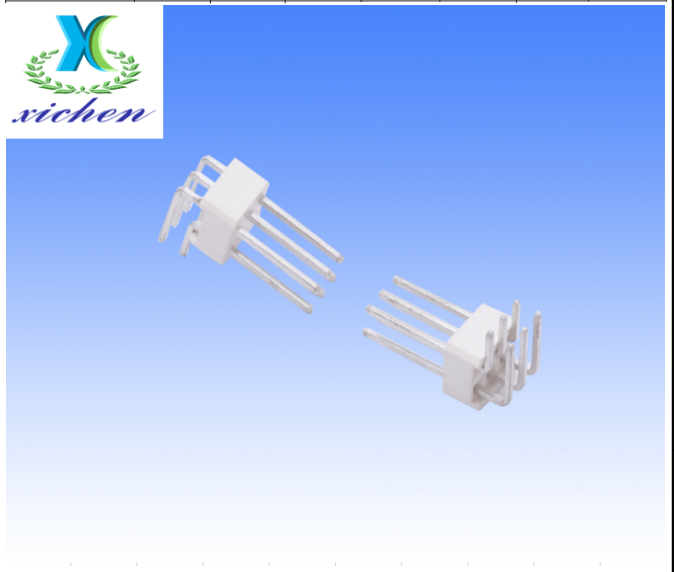

电话(tel)	0755-23317175		<b>深圳市熙宸电子科技有限公司</b> Shenzhen xichen Electronics Technology Co.,Ltd		
传真(fax)	0755-23010246				
单位(units)	MM	设计(draw)	王刚	图名(name)	PH1.5 双排90度 智能球泡灯专款
比例(scale)	1 : 1	审核(ch'k)	陈晓俊		
版次(rev.)	A / 1	核准(app'd)	邓志飞	料号(Part number)	
视图(view)		日期(date)		图档(File Name)	