
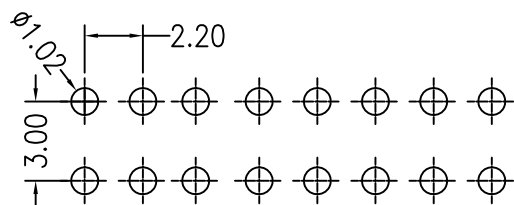
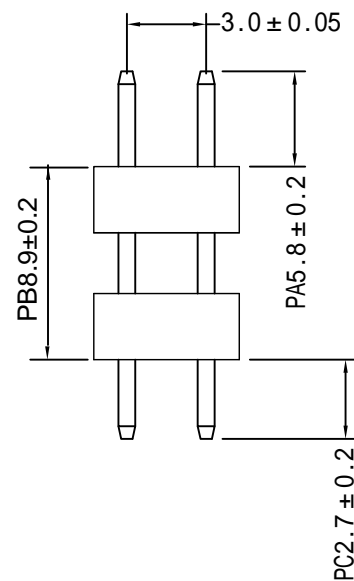


SPECIFICATIONS (规范)>>>

Current Rating (额定电流): 3.0Amps
 Withstanding Voltage (耐电压): AC 1000Vmin/Minute
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Contact Resistance (接触电阻): 20 mΩ MAX
 Operation Temperature (工作温度): -40℃to+105℃
 Material (材料)>>>

Plastic material (塑胶材质): PA6T/PA9T/LCP+30%GF
 Color (塑胶颜色): Black
 Insulator Material (绝缘材料): Polyester (UL94V-0)
 Contact Material (接触材料): Brass
 Contact Plating (接触电镀): Au Os Sn over 40u" Ni

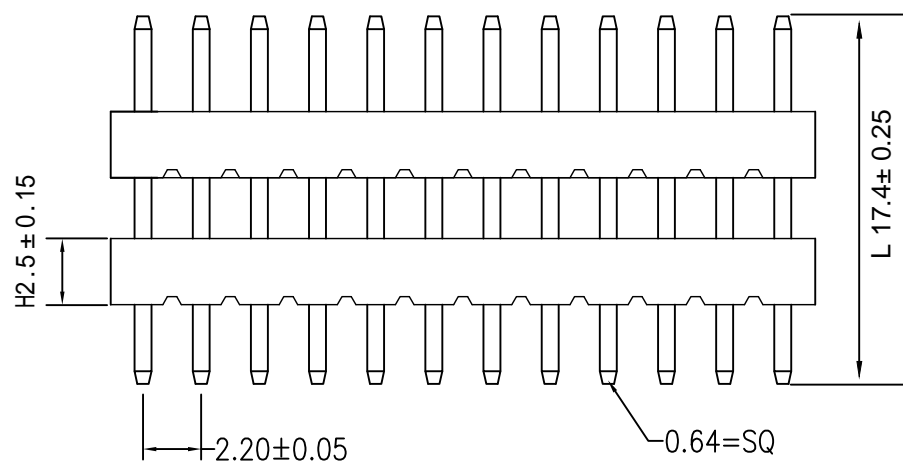

P.C.B Hole Layout

电话 (tel)	0755-23317175		 深圳市熙宸电子科技有限公司 Shenzhen xichen Electronics Technology Co.,Ltd		
传真 (fax)	0755-23010246				
单位 (units)	MM	设计 (draw)	王刚	图名 (name)	PH2.2 双排双塑 180度
比例 (scale)	1 : 1	审核 (ch'k)	陈晓俊	料号 (Part number)	
版次 (rev.)	A / 1	核准 (app'd)	邓志飞	视图 (view)	
视图 (view)		日期 (date)		图档 (File Name)	