
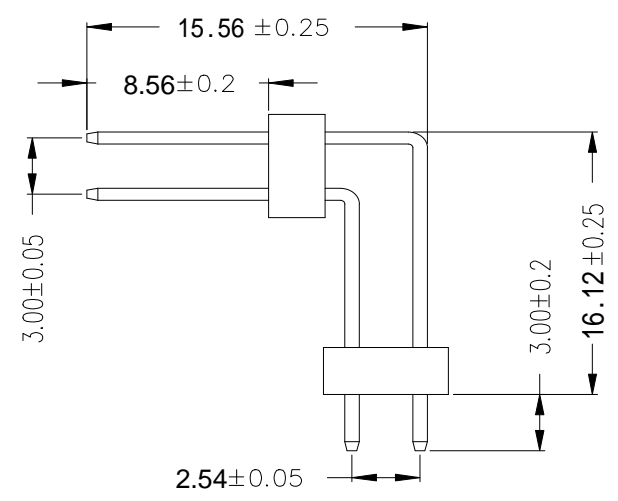
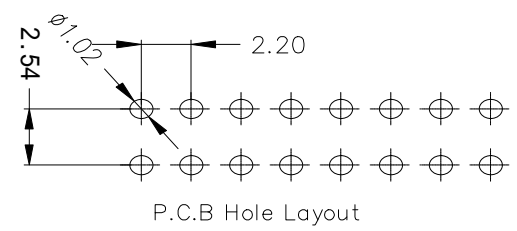


A	2.2 x No. of Contacts-2.2
B	2.2x No. of Positions

SPECIFICATIONS
 Current Rating: 3 Amps
 Withstanding Voltage: AC 1000V
 Insulation Resistance: 1000 Meg ohms MIN
 Contact Resistance: 20 milli ohms MAX
 Operation Temperature: -40°C to +105°C
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Contact Material: Brass
 Contact Plating: Goldflash over 40u" Ni
 Max. Processing Temp: 180° C for 30-60 seconds
 (200° C for 10 seconds)

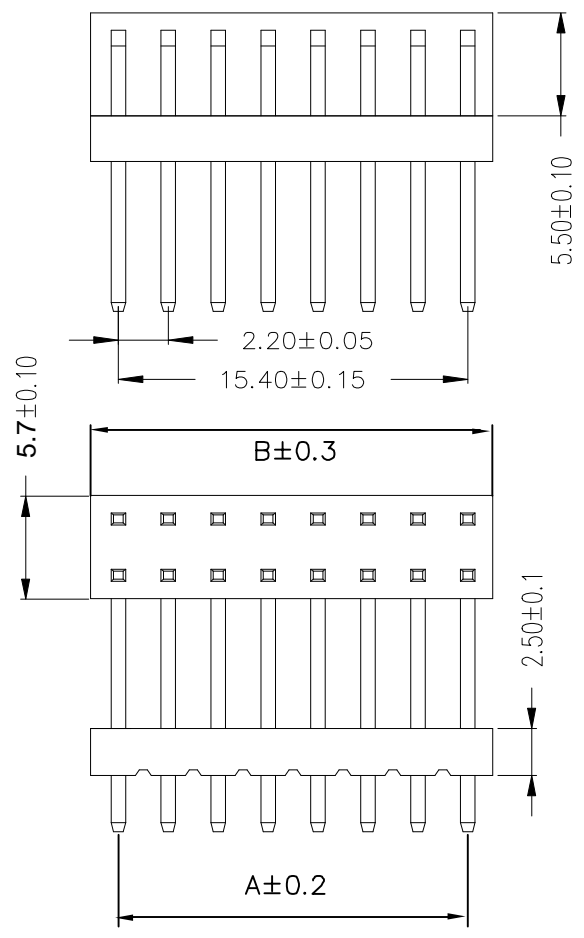

P 254 - 2XXX-R A A G0 - 001

Type P=Pin Header F=Female Header	Pitch 2.54=254 2.00=200 1.27=127 1.00=100 0.80=80 1.27X2.54=125	No. of Rows 2X01-40Pin 1X01-40Pin 2X01-50Pin 1X01-50Pin 3X01-40Pin	Connector Type S=Straight R=Right Angle M=SMT	Insulator Material Option A=BK-PBT B=BK-PA6T C=BK-PA9T D=LCP S=Special	DManner of packing Bag=A Box=B Tube=C Tape=D	Contact Plating SN: Tin G0: Gold Flash G2: 1U"Gold G3: 3U"Gold G4: 5U"Gold G5: 10U"Gold G6: 15U"Gold Standard: G0
--	---	---	--	---	--	---

电话 (tel)	0755-23317175		深圳市熙宸电子科技有限公司 Shenzhen Xichen Electronics Technology Co., Ltd		
传真 (fax)	0755-23010246				
单位 (units)	MM	设计 (draw)	王刚	图名 (name)	PH2.2 双排双塑 90度
比例 (scale)	1 : 1	审核 (ch'k)	陈晓俊		
版次 (rev.)	A / 1	核准 (app'd)	邓志飞	料号 (Part number)	
视图 (view)		日期 (date)		图档 (File Name)	