


**P.C.B Hole Layout**

SPECIFICATIONS (规范)>>>  
 Current Rating (额定电流) : 3.0Amps  
 Withstanding Voltage (耐电压) : AC 1000Vmin/Minute  
 Insulation Resistance (绝缘电阻) : 1000MΩ Min  
 Contact Resistance (接触电阻) : 20 mΩ MAX  
 Operation Temperature (工作温度) : -40°Cto+105°C  
 Material (材料)>>>  
 Plastic material (塑胶材质) : PA6T/PA9T/LCP+30%GF  
 Color (塑胶颜色) : Black  
 Insulator Material (绝缘材料) : Polyester (UL94V-0)  
 Contact Material (接触材料) : Brass  
 Contact Plating (接触电镀) : Au Os Sn over 40u" Ni

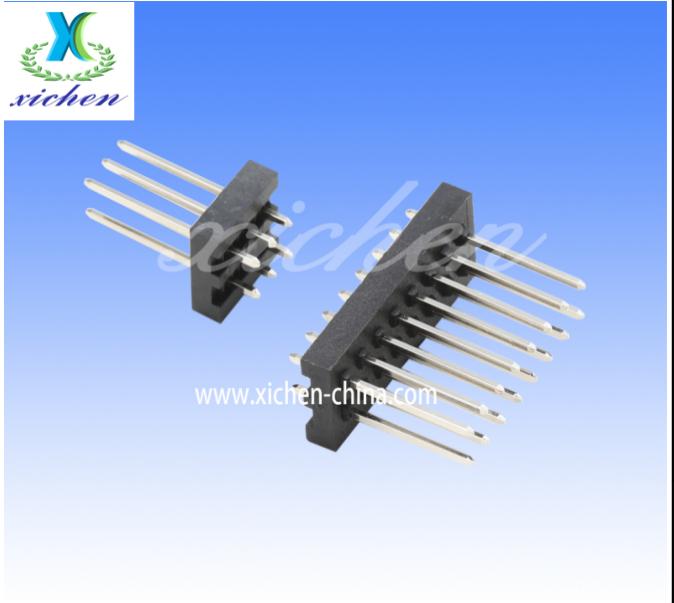

电话 (tel)	0755-23317175		 <b>深圳市熙宸电子科技有限公司</b> Shenzhen xichen Electronics Technology Co.,Ltd		
传真 (fax)	0755-23010246				
单位 (units)	MM	设计 (draw)	王刚	图名 (name)	PH3.0 双排 180度
比例 (scale)	1 : 1	审核 (ch'k)	陈晓俊	料号 (Part number)	
版次 (rev.)	A / 1	核准 (app'd)	邓志飞	图档 (File Name)	
视图 (view)		日期 (date)			