


Recommended P.C.B. Layout

SPECIFICATIONS (规范)>>>

- Current Rating (额定电流) : 3.0Amps
- Withstanding Voltage (耐电压) : AC 1000Vmin/Minute
- Insulation Resistance (绝缘电阻) : 1000MΩ Min
- Contact Resistance (接触电阻) : 20 mΩ MAX
- Operation Temperature (工作温度) : -40℃to+105℃
- Material (材料)>>>
- Plastic material (塑胶材质) : PA6T/PA9T/LCP+30%GF
- Color (塑胶颜色) : Black
- Insrlator Material (绝缘材料) : Polyester(UL94V-0)
- Contact Material (接触材料) : Brass
- Contact Plating (接触电镀) : Au Os Sn over 40u" Ni

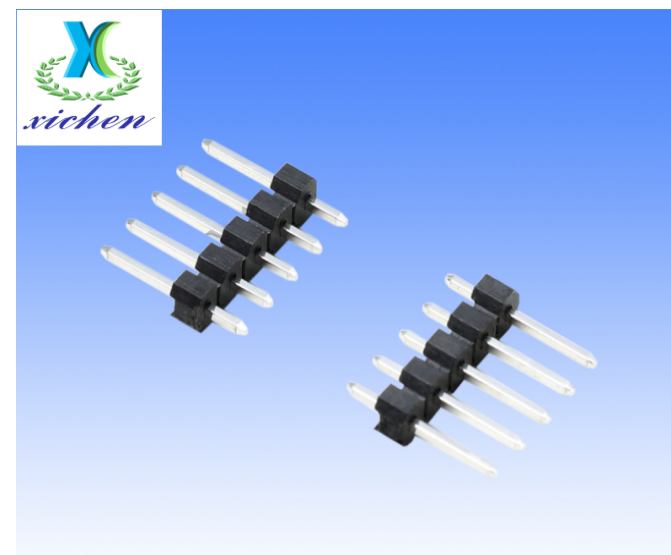

电话(tel)	0755-23317175		 深圳市熙宸电子科技有限公司 Shenzhen xichen Electronics Technology Co., Ltd		
传真(fax)	0755-23010246				
单位(units)	MM	设计(draw)	王刚	图名(name)	PH3.0 单排 180度
比例(scale)	1 : 1	审核(ch'k)	陈晓俊	料号(Part number)	
版次(rev.)	A / 1	核准(app'd)	邓志飞	图档(File Name)	
视图(view)		日期(date)			