
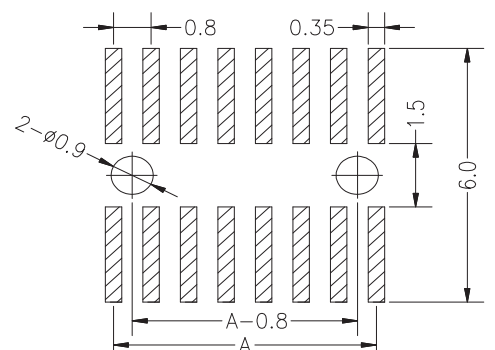

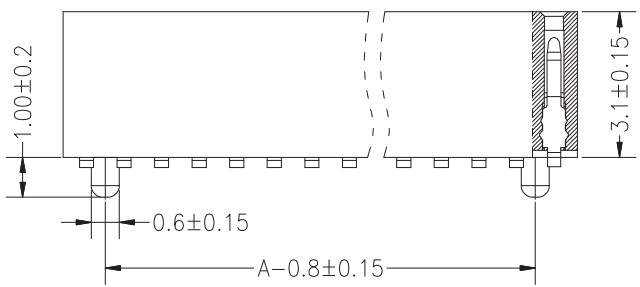


A

B

C

D

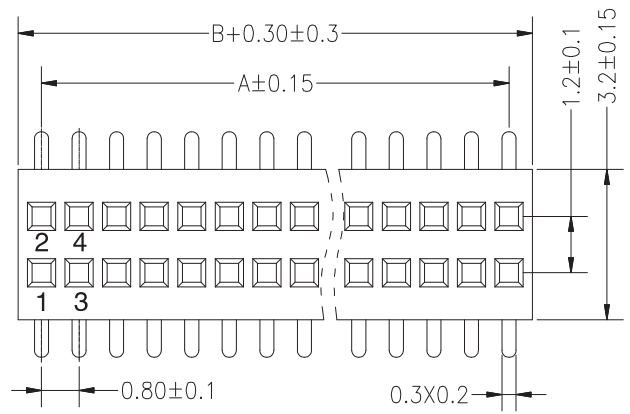


RECOMMEND P. C. B BOARD LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

SPECIFICATIONS (规范)>>>

- Current Rating (额定电流): 0.75Amps
- Withstanding Voltage (耐电压): AC 500Vmin/Minute
- Insulation Resistance (绝缘电阻): 1000MΩ Min
- Contact Resistance (接触电阻): 20 mΩ MAX
- Operation Temperature (工作温度): -40℃to+105℃
- Material (材料)>>>
 - Plastic material (塑胶材质): PA6T/PA9T/LCP+30%GF
 - Color (塑胶颜色): Black
 - Insrlator Material (绝缘材料): Polyester (UL94V-0)
 - Contact Material (接触材料): Brass
 - Contact Plating (接触电镀): Au Os Sn over 40u" Ni

Dimension antitheses list(尺寸对照表)

项目	H	PW	W				
常规尺寸	3.1	4.8	3.2				
客户需要							

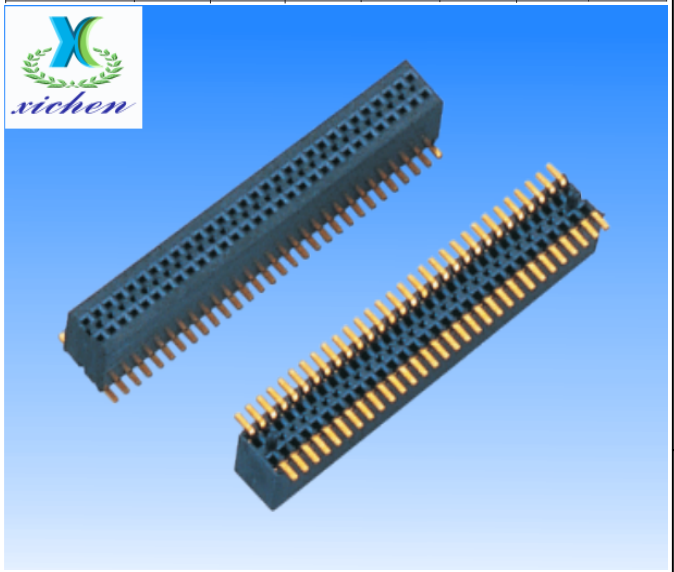

电话 (tel)	0755-23317175		深圳市熙宸电子科技有限公司 Shenzhen xichen Electronics Technology Co.,Ltd			
传真 (fax)	0755-23010246					
单位 (units)	MM	设计 (draw)	王刚	图名 (name)	PF0.8x1.2mm 双排SMT 塑高3.1带柱子	
比例 (scale)	1 : 1	审核 (ch'k)	陈晓俊	版次 (rev.)	A / 1	料号 (Part number)
视图 (view)		日期 (date)		图档 (File Name)		