

A	1.50 x No. of Contacts-1.50
B	1.50 x No. of Positions



SPECIFICATIONS (规范)>>>

Current Rating (额定电流): 1.0Amps
 Withstanding Voltage (耐电压): AC 500Vmin/Minute
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Contact Resistance (接触电阻): 60 mΩ MAX(Initial)
 100 mΩ MAX(After Life Test)

Operation Temperature (工作温度): -25°Cto+105°C

Material (材料)>>>

Plastic material (塑胶材质): LCP+30%G.F
 Color (颜色): Nature
 Insulator Material (绝缘材料): Polyester(UL94V-0)
 Contact Material (接触材料): Phosphor Bronze
 Contact Plating (接触电镀): Fog tin plating Or Sn over 40u" Ni

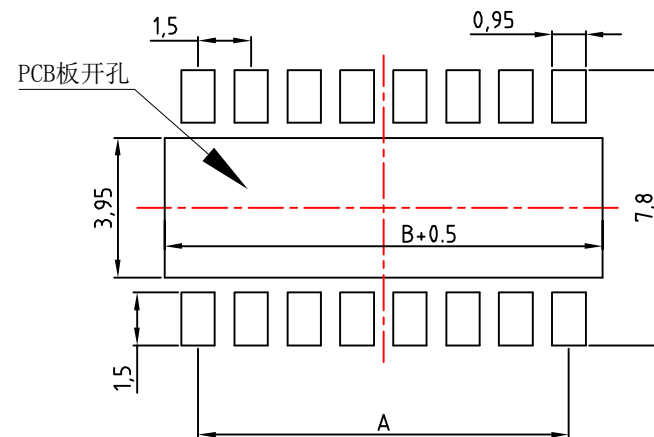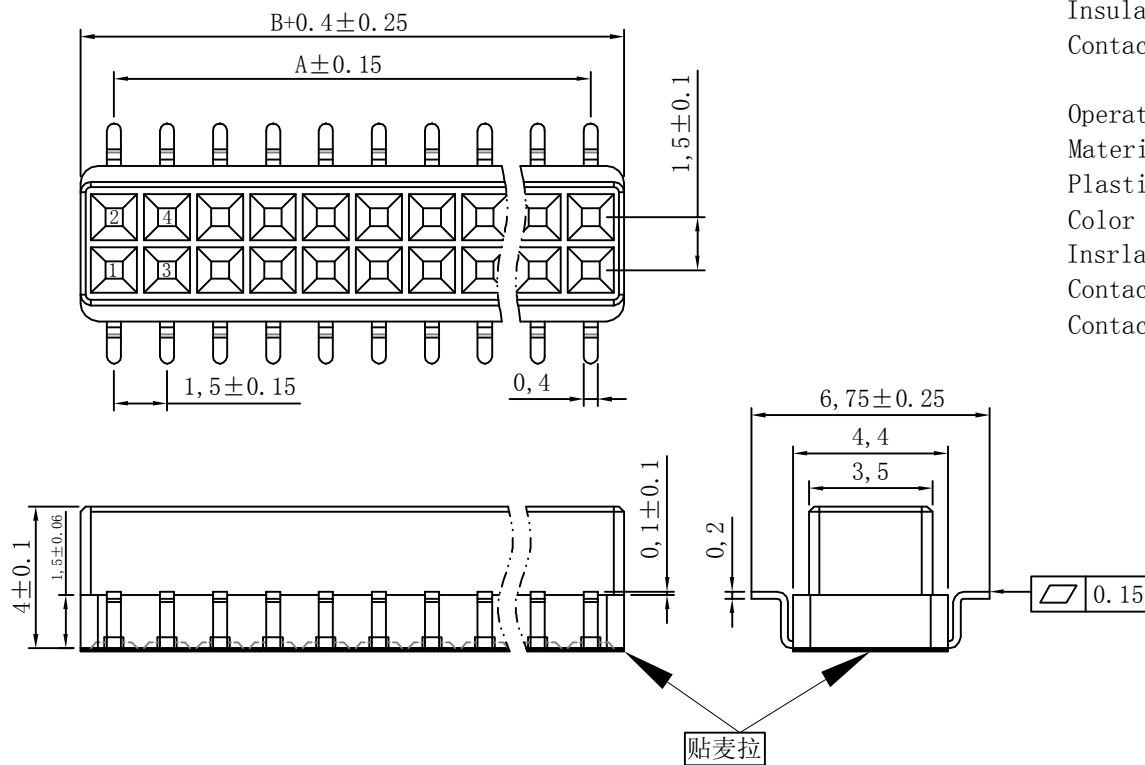

Material code(物料编码)>>>

F 150 2XX M D D SN 000

品名	间距	Pin位	类型	材质	包装	电镀	尺寸
Type F=Female Header	Pitch 150=1.50	No. of Pins Per Rows 2x01-30Pin	Connector Type M=SMT	Insulator Material Option B=BK-PA6T C=BK-PA9T D=LCP S=Special	DManner of packing B=Box C=Tube D=Tape Reel	Contact Plating SN:Tin G0:Gold Flash G2:2U"Gold G3:3U"Gold G4:5U"Gold G5:10U"Gold G6:15U"Gold G7:30U"Gold Standard:G0	Size PW

电话(tel)	0755-23317175		 深圳市熙宸电子科技有限公司 Shenzhen xichen Electronics Technology Co.,Ltd		
传真(fax)	0755-23010246				
单位(units)	MM	设计(draw)	王刚	图名(name)	PF1.5 双排 H4.0 沉板式SMT 展6.8 LCP
比例(scale)	1 : 1	审核(ch'k)	陈晓俊	料号(Part number)	
版次(rev.)	A / 1	核准(app'd)	邓志飞	图档(File Name)	
视图(view)		日期(date)			